



VAMP-TECH S.p.A  
Via delle Industrie 10/12 - 20874 Busnago (MB)  
Phone +39.039.6957821  
Fax: +39.039.6820563-6956388  
E-mail: marketing@vampotech.it

Advanced Modified Polymers

**Ticona**  
Performance Driven Solutions™

## HOSTAFORM® C 9021 GV3/30 | POM | Glass Reinforced

### Description

Chemical abbreviation according to ISO 1043-1: POM  
Molding compound ISO 9988- POM-K, M-GNR, 02-002, GB30

POM copolymer

Injection molding type, reinforced with ca. 30 % glass spheres; high resistance to thermal and oxidative degradation.

UL-registration in natural and a thickness more than 0.81 mm, in black and a thickness more than 1.0 mm as UL94 HB, temperature index UL 746 B for a thickness of 1.57 mm, electrical 105 °C, mechanical 95 °C (tensile impact) and 100 °C (tensile).

Burning rate ISO 3795 and FMVSS 302 < 100 mm/min for a thickness more than 1 mm.

Ranges of applications: For low-warpage and dimensionally stable molded parts with higher rigidity and hardness.

FMVSS = Federal Motor Vehicle Safety Standard (USA)

UL = Underwriters Laboratories (USA)

Physical properties	Value	Unit	Test Standard
Density	1590	kg/m <sup>3</sup>	ISO 1183
Melt volume rate (MVR)	7.5	cm <sup>3</sup> /10min	ISO 1133
MVR test temperature	190	°C	ISO 1133
MVR test load	2.16	kg	ISO 1133
Water absorption (23°C-sat)	0.9	%	ISO 62

Mechanical properties	Value	Unit	Test Standard
Tensile modulus (1mm/min)	3900	MPa	ISO 527-2/1A
Tensile stress at yield (50mm/min)	38	MPa	ISO 527-2/1A
Tensile strain at yield (50mm/min)	6	%	ISO 527-2/1A
Nominal strain at break (50mm/min)	12	%	ISO 527-2/1A
Tensile creep modulus (1h)	3300	MPa	ISO 899-1
Tensile creep modulus (1000h)	2100	MPa	ISO 899-1
Flexural modulus (23°C)	3500	MPa	ISO 178
Charpy impact strength @ 23°C	40	kJ/m <sup>2</sup>	ISO 179/1eU
Charpy impact strength @ -30°C	40	kJ/m <sup>2</sup>	ISO 179/1eU
Charpy notched impact strength @ 23°C	3	kJ/m <sup>2</sup>	ISO 179/1eA
Charpy notched impact strength @ -30°C	3	kJ/m <sup>2</sup>	ISO 179/1eA

Thermal properties	Value	Unit	Test Standard
Melting temperature (10°C/min)	166	°C	ISO 11357-1,-2,-3
DTUL @ 1.8 MPa	112	°C	ISO 75-1/-2
Coeff.of linear therm. expansion (parallel)	0.9	E-4/°C	ISO 11359-2
Coeff.of linear therm. expansion (normal)	0.9	E-4/°C	ISO 11359-2
Flammability @1.6mm nom. thickn.	HB	class	UL94
thickness tested (1.6)	1.57	mm	UL94
UL recognition (1.6)	UL	-	UL94
Flammability at thickness h	HB	class	UL94

Printed: 13. May 2013 - Page: 1



VAMP-TECH S.p.A  
 Via delle Industrie 10/12 - 20874 Busnago (MB)  
 Phone +39.039.6957821  
 Fax: +39.039.6820563-6956388  
 E-mail: marketing@vamptech.it

Advanced Modified Polymers

**Ticona**  
 Performance Driven Solutions™

**HOSTAFORM® C 9021 GV3/30 | POM | Glass Reinforced**

Thermal properties	Value	Unit	Test Standard
thickness tested (h)	<b>0.81</b>	mm	UL94
UL recognition (h)	<b>UL</b>	-	UL94



Electrical properties	Value	Unit	Test Standard
Relative permittivity - 100 Hz	<b>5</b>	-	IEC 60250
Relative permittivity - 1 MHz	<b>4.5</b>	-	IEC 60250
Dissipation factor - 100 Hz	<b>300</b>	E-4	IEC 60250
Dissipation factor - 1 MHz	<b>80</b>	E-4	IEC 60250
Volume resistivity	<b>1E12</b>	Ohm*m	IEC 60093
Surface resistivity	<b>1E14</b>	Ohm	IEC 60093
Electric strength	<b>40</b>	kV/mm	IEC 60243-1
Comparative tracking index CTI	<b>600</b>	-	IEC 60112

Test specimen production	Value	Unit	Test Standard
Processing conditions acc. ISO	<b>9988</b>	-	Internal

Rheological Calculation properties	Value	Unit	Test Standard
Density of melt	<b>1370</b>	kg/m³	Internal
Thermal conductivity of melt	<b>0.225</b>	W/(m K)	Internal
Specific heat capacity of melt	<b>1780</b>	J/(kg K)	Internal
Eff. thermal diffusivity	<b>7.30E-8</b>	m²/s	Internal
Ejection temperature	<b>164</b>	°C	Internal

**Dynamic Shear modulus-temperature**

**Stress-strain**

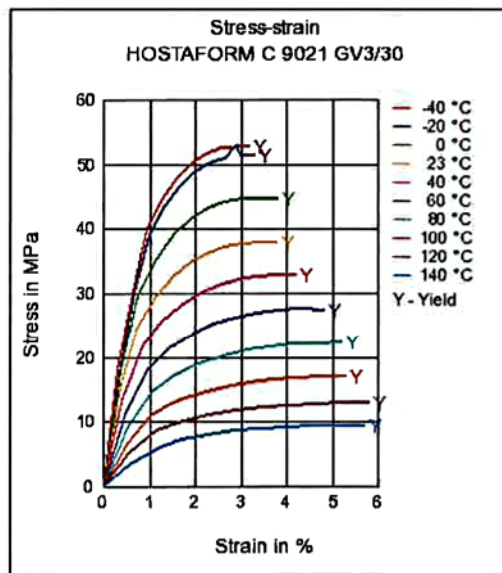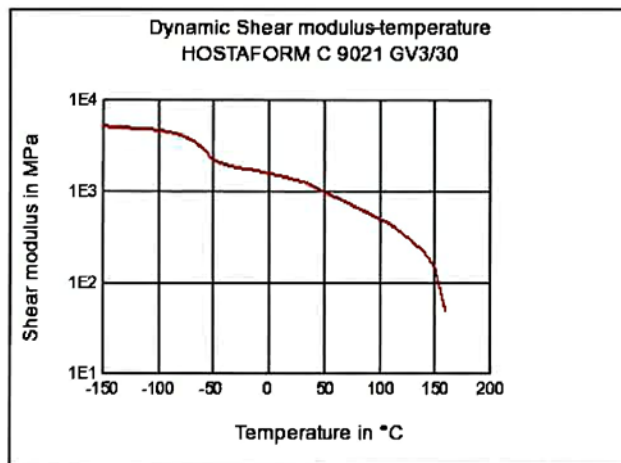



VAMP-TECH S.p.A  
Via delle Industrie 10/12 - 20874 Busnago (MB)


Phone +39.039.6957821  
Fax: +39.039.6820563-6956388  
E-mail: marketing@vamptech.it

Advanced Modified Polymers


**Ticona**  
Performance Driven Solutions™

**HOSTAFORM® C 9021 GV3/30 | POM | Glass Reinforced**

**Secant modulus-strain**

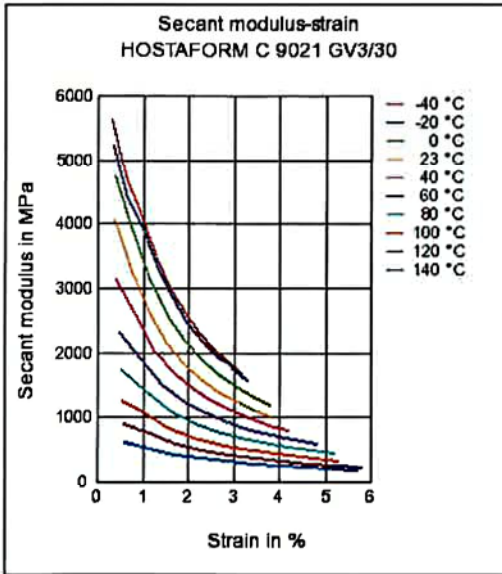

**Typical injection moulding processing conditions**

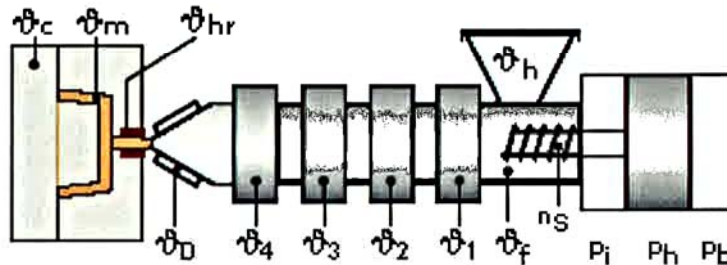

**Pre Drying:**

**Necessary low maximum residual moisture content: 0.15%**

Drying is not normally required. If material has come in contact with moisture through improper storage or handling or through regrind use, drying may be necessary to prevent splay and odor problems.

The product can then be stored in standard conditions until processed.

**Drying time: 3 - 4 h**

**Drying temperature: 100 - 120 °C**

**Temperature:**

	ϕ Manifold	ϕ Mold	ϕ Melt	ϕ Nozzle	ϕ Zone4	ϕ Zone3	ϕ Zone2	ϕ Zone1	ϕ Feed	ϕ Hopper
min (°C)	190	80	190	190	190	190	180	170	60	20
max (°C)	210	120	210	210	210	200	190	180	80	30



VAMP-TECH S.p.A  
Via delle Industrie 10/12 - 20874 Busnago (MB)  
Phone +39.039.6957821  
Fax: +39.039.6820563-6956388  
E-mail: marketing@vamptech.it

**Ticona**  
Performance Driven Solutions™

## HOSTAFORM® C 9021 GV3/30 | POM | Glass Reinforced

### Pressure:

	Inj press	Hold press	Back pressure
min (bar)	600	600	0
max (bar)	1200	1200	20

### Speed:

Injection speed: slow

### Screw speed

	16	25	40	55	75
Screw diameter (mm)	16	25	40	55	75
Screw speed (RPM)	-	150	100	70	-

## Injection Molding

Standard injection moulding machines with three phase (15 to 25 D) plasticating screws will fit.

Melt temperature 190-230 °C  
Mould temperature 80-120 °C

## Contact Information

### Americas

Ticona North American Headquarters  
Product Information Service  
8040 Dixie Highway  
Florence, KY 41042  
USA  
Tel.: +1-800-833-4882  
Tel.: +1-859-372-3244  
email: [prodinfo@ticona.com](mailto:prodinfo@ticona.com)  
Ticona on the web: [www.ticona.com](http://www.ticona.com)

### Customer Service

Tel.: +1-800-526-4960  
Tel.: +1-859-372-3214  
Fax: +1-859-372-3125

### Europe

Ticona GmbH  
Information Service  
Tel.: +49 (0) 180-5842662 (Germany)  
+49 (0) 69-30516299 (Europe)  
Fax: +49 (0) 180-2021202 (Germany & Europe)  
email: [infoservice@ticona.de](mailto:infoservice@ticona.de)  
Internet: [www.ticona.com](http://www.ticona.com)

## General Disclaimer

NOTICE TO USERS: Values shown are based on testing of laboratory test specimens and represent data that fall within the standard range of properties for natural material. These values alone do not represent a sufficient basis for any part design and are not intended for use in establishing maximum, minimum, or ranges of values for specification purposes. Colorants or other additives may cause significant variations in data values.

Properties of molded parts can be influenced by a wide variety of factors including, but not limited to, material selection, additives, part design, processing conditions and environmental exposure. Any determination of the suitability of a particular material and part design for any use contemplated by the users and the manner of such use is the sole responsibility of the users, who must assure themselves that the material as subsequently processed meets the needs of their particular product or use.



VAMP-TECH S.p.A  
Via delle Industrie 10/12 - 20874 Busnago (MB)  
Phone +39.039.6957821  
Fax: +39.039.6820563-6956388  
E-mail: marketing@vamptech.it

**Ticona**  
Performance Driven Solutions™

## HOSTAFORM® C 9021 GV3/30 | POM | Glass Reinforced

To the best of our knowledge, the information contained in this publication is accurate; however, we do not assume any liability whatsoever for the accuracy and completeness of such information. The information contained in this publication should not be construed as a promise or guarantee of specific properties of our products. It is the sole responsibility of the users to investigate whether any existing patents are infringed by the use of the materials mentioned in this publication.

Moreover, there is a need to reduce human exposure to many materials to the lowest practical limits in view of possible adverse effects. To the extent that any hazards may have been mentioned in this publication, we neither suggest nor guarantee that such hazards are the only ones that exist. We recommend that persons intending to rely on any recommendation or to use any equipment, processing technique or material mentioned in this publication should satisfy themselves that they can meet all applicable safety and health standards.

We strongly recommend that users seek and adhere to the manufacturer's current instructions for handling each material they use, and entrust the handling of such material to adequately trained personnel only. Please call the telephone numbers listed (+49 (0) 69 30516299 for Europe and +1 859-372-3244 for the Americas) for additional technical information. Call Customer Services for the appropriate Materials Safety Data Sheets (MSDS) before attempting to process our products.

The products mentioned herein are not intended for use in medical or dental implants.

© Copyright 2007, Ticona, all rights reserved. (Pub. 29-April-2013)